



Tornillos, Juntas y Bridas de Sensor de O2

**Disponible en
Acero suave e inoxidable**

**AMPLIA OFERTA –PERFECTO
PARA ALTO RENDIMIENTO,
REPARACIONES Y TRABAJOS
PERSONALIZADOS!**

- *Disponible en Cantidades por Bulbo*
- *Fabricacion Personalizada*



Parts are Enlarged



CALIDAD • COBERTURA • SOPORTE

 90-164* O2 Sensor Bung 1215 Mild Steel 18mm Threads 1.0" OD x 0.400" Thick	 90-164SS* O2 Sensor Bung 303 Stainless Steel 18mm Threads 1.0" OD x 0.400" Thick	 90-164SS-C O2 Sensor Bung w/ Curve 303 Stainless Steel 18mm Threads 1.0" OD x 0.400" Thick	 90-184* O2 Sensor Bung - Stepped 1215 Mild Steel 18mm Threads 1.0" OD x 0.875" Step x 0.530" Thick	 90-184SS* O2 Sensor Bung - Stepped 303 Stainless Steel 18mm Threads 1.0" OD x 0.875" Step x 0.530" Thick	 90-184SS-M O2 Sensor Bung - Stepped 316 Stainless Steel 18mm Threads 1.0" OD x 0.875" Step x 0.530" Thick
 90-186* O2 Sensor Bung - Stepped 1215 Mild Steel 10mm Threads 0.980" OD x 0.735" Step x 0.320" Thick	 90-186SS* O2 Sensor Bung - Stepped 303 Stainless Steel 10mm Threads 0.980" OD x 0.735" Step x 0.320" Thick	 90-187* O2 Sensor Bung - Stepped 1215 Mild Steel 12mm Threads 0.985" OD x 0.740" Step x 0.315" Thick	 90-187SS* O2 Sensor Bung - Stepped 303 Stainless Steel 12mm Threads 0.985" OD x 0.740" Step x 0.315" Thick	 90-189* O2 Sensor Bung 1215 Mild Steel 12mm Threads 1.0" OD x 0.500" Thick	 90-189SS* O2 Sensor Bung 303 Stainless Steel 12mm Threads 1.0" OD x 0.500" Thick
 90-190* O2 Sensor Bung - 62° Angle 1215 Mild Steel 18mm Threads 1.0" OD x 0.975" Thick	 90-190SS* O2 Sensor Bung - 62° Angle 303 Stainless Steel 18mm Threads 1.0" OD x 0.975" Thick	 90-195* O2 Sensor Bung 1215 Mild Steel 18mm Threads 1.0" OD x 1.000" Thick	 90-195SS* O2 Sensor Bung 303 Stainless Steel 18mm Threads 1.0" OD x 1.000" Thick	 90-195SS-C O2 Sensor Bung w/ Curve 303 Stainless Steel 18mm Threads 1.0" OD x 1.000" Thick	 90-199* O2 Sensor Bung 1215 Mild Steel 18mm Threads 1.0" OD x 0.500" Thick
 90-199SS* O2 Sensor Bung 303 Stainless Steel 18mm Threads 1.0" OD x 0.500" Thick	 90-206SS-C O2 Sensor Bung - 62° Angle w/ Curve 303 Stainless Steel 18mm Threads 0.985" OD x 0.824" Thick	 90-207SS-C O2 Sensor Bung w/ Curve 303 Stainless Steel 18mm Threads 0.985" OD x 0.550" Thick	 90-208SS O2 Sensor Bung w/ Curve 304L Stainless Steel 18mm Threads 1.0" OD x 0.434" Thick	 90-211 O2 Sensor Bung 1215 Mild Steel 18mm Threads 1.0" OD x 0.375" Thick	 90-213-C O2 Sensor Bung - 60° Angle w/ Curve 1215 Mild Steel 18mm Threads 1.0" OD x 1.025" Thick
 90-214SS O2 Sensor Bung 303 Stainless Steel 1/8-27 NPT Threads 0.500" OD x 0.500" Thick	 90-185* O2 Sensor Bung Plug 1215 Mild Steel 18mm Threads 1.0" Hex 0.650" Thick Use with 1401FP Copper Washer	 90-185SS* O2 Sensor Bung Plug 303 Stainless Steel 18mm Threads 1.0" Hex 0.650" Thick Use with 1401FP Copper Washer	 90-191 O2 Sensor Bung Plug 1215 Mild Steel 1/2-28 UNEF Threads	 90-200* Bung Plug - Internal 8mm Hex 1215 Mild Steel 18mm Threads 0.875" OD x 0.510" Thick Use with 1401FP Copper Washer	 90-200SS* Bung Plug - Internal 8mm Hex 303 Stainless Steel 18mm Threads 0.875" OD x 0.510" Thick Use with 1401FP Copper Washer
 90-203* Bung Plug - Internal 6mm Hex 1215 Mild Steel 12mm Threads 0.625" OD x 0.400" Thick Use with 215FP Copper Washer	 90-203SS* Bung Plug - Internal 6mm Hex 303 Stainless Steel 12mm Threads 0.625" OD x 0.400" Thick Use with 215FP Copper Washer	 90-204* O2 Sensor Bung 1215 Mild Steel 12mm Threads 0.625" Hex 0.570" Thick Use with 215FP Copper Washer	 90-204SS* O2 Sensor Bung 303 Stainless Steel 12mm Threads 0.625" Hex 0.570" Thick Use with 215FP Copper Washer	 90-210 Plug - 12mm Internal Threads 1215 Mild Steel 18mm Threads 0.875" Hex 0.368" Thick Use with 1401FP Copper Washer	 90-210SS Plug - 12mm Internal Threads 303 Stainless Steel 18mm Threads 0.875" Hex 0.368" Thick Use with 1401FP Copper Washer
 90-212 Plug - 1/8-27NPT Internal Threads 1215 Steel, Zinc Plated 18mm Threads 1.0" Hex 0.65" Thick Use with 1401FP Copper Washer	 85-417 O2 Sensor Flange 38mm x 44mm 18mm Threads	 85-418 O2 Sensor Flange 44mm x 54mm 18mm Threads	 85-419 O2 Sensor Boss 1215 Mild Steel, 18mm Threads 0.460" Thick, M8 x 1.25" Studs	 165-197 O2 Sensor Flange Gasket 44mm x 54mm	 165-202 O2 Sensor Flange Gasket 38mm x 44mm
 215FP Copper Seal Washer Pack of 10 pieces I.D. 0.470" x O.D. 0.625" x 0.030 Thick	 1401F Copper Seal Washer Pack of 10 pieces I.D. 0.710" x O.D. 0.910" x 0.045 Thick				

Nota: Todas las partes seguridad por el asterisco (*) en esta pagina estan disponibles en paquetes de 5. Todas estas tendran la P como sufijo. Ejemplo: 90-186P o 90-187SSP.

SS Denota Acero inoxidable 303, todas las demas son 215 acero suave.

© 2022 Walker Products, Inc. Todos los derechos reservados.

88-823

O2 Sensor Socket

Standard O2 Sensors
6 Point With 25/32" Wire Opening
Fits 7/8" or 22mm 3/8" Drive



88-830

O2 Sensor Wrench

12 & 6 Point 2 1/8" Offset

The 12 point side enables the technician twice the number of clock angle attachment positions. This gives the technician the maximum accessibility to remove O2 Sensors in difficult areas.

The 6 point side provides the technician the maximum holding power for O2 Sensors that are corroded in place.

Fits with all configurations of O2 Sensor wire/connectors. Designed with additional offset enabling use on LTI Gen II 5.7L HO MPFI V-8 found in the 1992 and later Chevrolet Corvette, 1993 and later Camaro and 1993 and later Pontiac Firebird / Trans Am also 1989 and later Corvette ZR1 with the LT5 5.7L DOHC SFI V-8



88-829

O2 Sensor Wrench

12 & 6 Point

Includes a 12 point and 6 point socket giving the technician the ultimate tool to remove O2 Sensors in confined areas.

The 12 point side enables the technician twice the number of clock angle attachment positions. This gives the technician the maximum accessibility to remove O2 Sensors in difficult areas.

The 6 point side provides the technician the maximum holding power for O2 Sensors that are corroded in place.

Fits with all configurations of O2 Sensor wire/connectors.



88-831

O2 Sensor Wrench

Shielded Applications

This unique tool has been designed to R&R shielded O2 Sensors currently found on Toyota and Lexus vehicles.

The depth and outer diameter of the socket are critical features enabling it to fit in the limited space of the heat shield.

This tool features a 12 point double hex enabling the technician twice the number of clock angle attachment positions versus a 6 point design. For maximum strength this tool is forged chromolly steel and comes in a black finish.



88-832

O2 Sensor Bung Thread Repair Kits

Includes:

1 Tap

1 Insert Tool

6 Repair Inserts



88-835

O2 Sensor Wrench

6 Point 3/8" Drive
1.2" Overall Depth

The 6 point side provides the technician the maximum holding power for O2 Sensors that are corroded in place.

Fits with all configurations of O2 Sensor wire connectors.



88-833

O2 Sensor Bung Insert Kit

Includes: 6- Repair Inserts



88-836

O2 Sensor Socket

Standard O2 Sensors
6 Point With 9/32" Wire Opening
Fits 7/8" or 22mm 3/8" Drive



88-834

O2 Sensor Wrench


Standard O2 Sensors
Fits 7/8" or 22mm 2" Overall Depth



88-837

O2 Sensor Chaser

M18x1.5 Thread Chaser
3/8" Drive

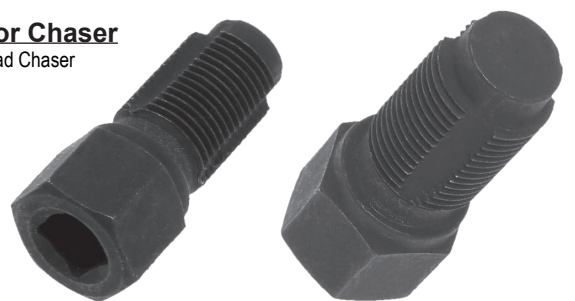



O2 Sensor Bung & Plug Kits

**Available in both
Mild & Stainless Steel**



PERFECT FOR HIGH PERFORMANCE, CUSTOM & REPAIR JOBS!

Walker's bung kits feature 6 popular bungs and include plugs, gaskets and flanges. These handy kits will save busy technician's time and increase profits.

Bungs & Plugs also available in bulk quantities!

Custom Bung & Plug Kits available!

**CALL US FOR MORE
INFORMATION!**



Steel Bungs, Plugs
and Flanges WPA-105

Stainless Steel Bungs,
Plugs and Flanges
WPA-105SS



What is included:

WPA-105SS - Stainless Steel				
Part Number	Qty	Description	Re-Fill No.	Qty
85-417	2 Ea	Flange, 38-44mm	85-417	1 Ea.
85-418	2 Ea	Flange, 44-54mm	85-418	1 Ea.
90-164SS	5 Ea	Stainless Steel Bung 18mm	90-164SSP	5 Ea.
90-184SS	5 Ea	Stainless Steel Bung 18mm (Stepped)	90-184SSP	5 Ea.
90-185SS	5 Ea	Stainless Steel Bung 18mm (Plug)	90-185SSP	5 Ea.
90-186SS	5 Ea	Stainless Steel Bung 10mm (Stepped)	90-186SSP	5 Ea.
90-187SS	5 Ea	Stainless Steel Bung 12mm (Stepped)	90-187SSP	5 Ea.
90-190SS	5 Ea	Stainless Steel Bung 18mm (Angled)	90-190SSP	5 Ea.
90-195SS	5 Ea	Stainless Steel Bung 18mm (1")	90-195SSP	5 Ea.
165-197	2 Ea	Gasket, 44-54mm Flange	165-197	1 Ea.
165-202	2 Ea	Gasket, 38-44mm Flange	165-202	1 Ea.

WPA-105 - Steel				
Part Number	Qty	Description	Re-Fill No.	Qty
85-417	2 Ea	Flange, 38-44mm	85-417	1 Ea.
85-418	2 Ea	Flange, 44-54mm	85-418	1 Ea.
90-164	5 Ea	Steel Bung 18mm	90-164P	5 Ea.
90-184	5 Ea	Steel Bung 18mm (Stepped)	90-184P	5 Ea.
90-185	5 Ea	Steel Bung 18mm (Plug)	90-185P	5 Ea.
90-186	5 Ea	Steel Bung 10mm (Stepped)	90-186P	5 Ea.
90-187	5 Ea	Steel Bung 12mm (Stepped)	90-187P	5 Ea.
90-190	5 Ea	Steel Bung 18mm (Angled)	90-190P	5 Ea.
90-195	5 Ea	Steel Bung 18mm (1")	90-195P	5 Ea.
165-197	2 Ea	Gasket, 44-54mm Flange	165-197	1 Ea.
165-202	2 Ea	Gasket, 38-44mm Flange	165-202	1 Ea.

WALKER PRODUCTS, INC. • 525 WEST CONGRESS STREET • PACIFIC, MO 63069

U.S. Corporate Office: 636-257-2400 • Fax: 636-257-6211

Customer Service: 636-257-1700 • Technical Support: 844-252-0114

U.K. Sales Office and Distribution Center: +44 (0) 121-459-8006 • saleseurope@walkerproducts.com

Oficinas para Mexico: +52-72-2402-2167 • Soporte tecnico y servicio al cliente en Mexico: +52-72-2207-8957

www.walkerproducts.com

QUALITY • COVERAGE • SUPPORT

©2022 Walker Products, Inc. All rights reserved. WF37-123B Rev. 1-2023